



Toets Features

- Wireless presentation for upgraded efficiency
- Single cable via USB-C with 65W power delivery
- 24/7 Sustainable video playback for continuous communication
- Remote device management with myViewBoard Manager
- ProAV compatibility with Crestron, Extron, and AMX

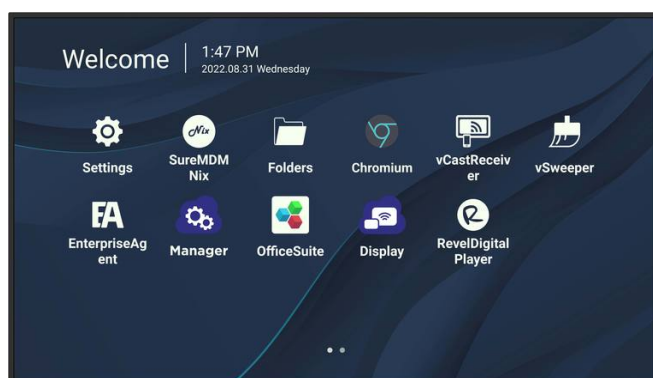

Product Omschrijving

With stunning 4K Ultra HD resolution, high brightness, and landscape and portrait modes, the CDE30 Series offers continuous and sustainable 24/7 display for both corporate and campus communication. Purpose-engineered for ease of use, the display is equipped with a Quad Core SoC to run multiple operations seamlessly, and its USB-C one-cable solution sorts for effortless connection with external devices. Designed for easy-to-operate continuous multimedia playback, the CDE30 Series offers cable-free screen casting and screen sharing through myViewBoard Display and vCast, which also supports Airplay and Chromecast. Remote management via the intuitive myViewBoard Manager makes changing content, broadcasting, and software updates a breeze. Available in six sizes ranging from 43" to 98", the CDE30 Series features HDMI input and output for seamless tiling of up to 9 screens, meeting the communication needs of any campus, corporate, or retail space.

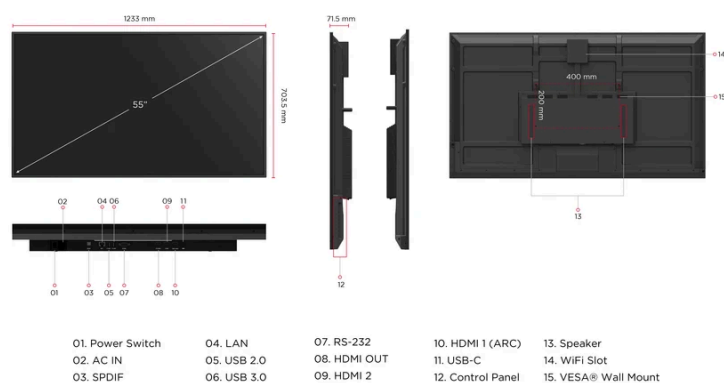

DISPLAY

Paneelgrootte:	55"
Type:	TFT LCD Module. VA type, DLED backlight
Weergavegebied (mm):	1209.6 (H) × 680.4 (V) (54.64" diagonal)
Native resolutie:	3840 x 2160
Aspectratio:	16:9
Colors:	1.07G (8bits + FRC-)
Helderheid:	500 nits
Contrastverhouding:	1200:1 (typ.), 5000:1 (DCR enabled)
Reactietijd:	6.5ms
Kijkhoeken:	H = 178, V = 178 typ.
Levensduur achtergrondverlichting:	50,000 hours
Oppervlakte behandeling:	Anti-Glaire, 3H hardness, Haze 25%
Bezel:	9.9/9.9/9.9/9.9 mm (L/R/T/B)
Oriëntatie:	Landscape & Portrait

PLATFORM

Processor:	Quad-core ARM Cortex A55
RAM:	4GB
Opslag:	32GB

INPUT

HDMI:	2.1x2 (3840x2160 @60Hz, HDMI 1 supports ARC)
RS-232:	x 1
WiFi Slot:	x 1

OUTPUT

HDMI:	2.0 x1 (3840x2160 @60Hz)
SPDIF:	x 1

LAN

RJ45:	x 1
-------	-----

USB

Type A:	2.0 x 1, 3.0 x 1
Type C:	x1 ((DP1.2, PD 65W, USB2.0, 100M ethernet)

SPEAKERS

10W x2

INGESLOTEN BESTURINGSSYSTEEM

Android 11

POWER

Spanning:	100-240 VAC +/- 10%
Consumptie:	82 W(typ.) < 0.5W(off)

OPERATING CONDITIONS

Temperatuur (° C):	0 to 40°C
Luchtvochtigheid:	10%-90% RH

OPERATING HOURS

7/24

AFMETINGEN (B X H X D)

Fysiek (inch/mm):	48.54 x 27.70 x 2.81in/ 1233 x 703.5 x 71.5mm
Verpakking (inch / mm):	52.44 x 32.24 x 6.14 in./1332 x 819 x 156 mm

WEIGHT

Netto (lb / kg):	29.54 lbs/13.4 kg
Bruto (lb/kg):	42.99 lbs/19.5 kg

REGULATIONS

cTUVus, FCC/ICES003, Energy star 8.0, EPEAT, Mexico NOM , Mexico Energy, EMC/CE , CB, EAC, UkrSEPRO, RCM, LBL, Flicker free, Green BOM, RoHS , ErP, REACH, SCIP, WEEE , Annex I, Annex II, TPCH , Packing waste, CA65

VERPAKKINGSINHOUD

1. Remote Control with batteries
2. Quick Start Guide
3. Power Cables
4. HDMI cable
5. USB-C cable
6. Wall Mount Screw x 4
7. RS232 adapter
8. Compliance statement